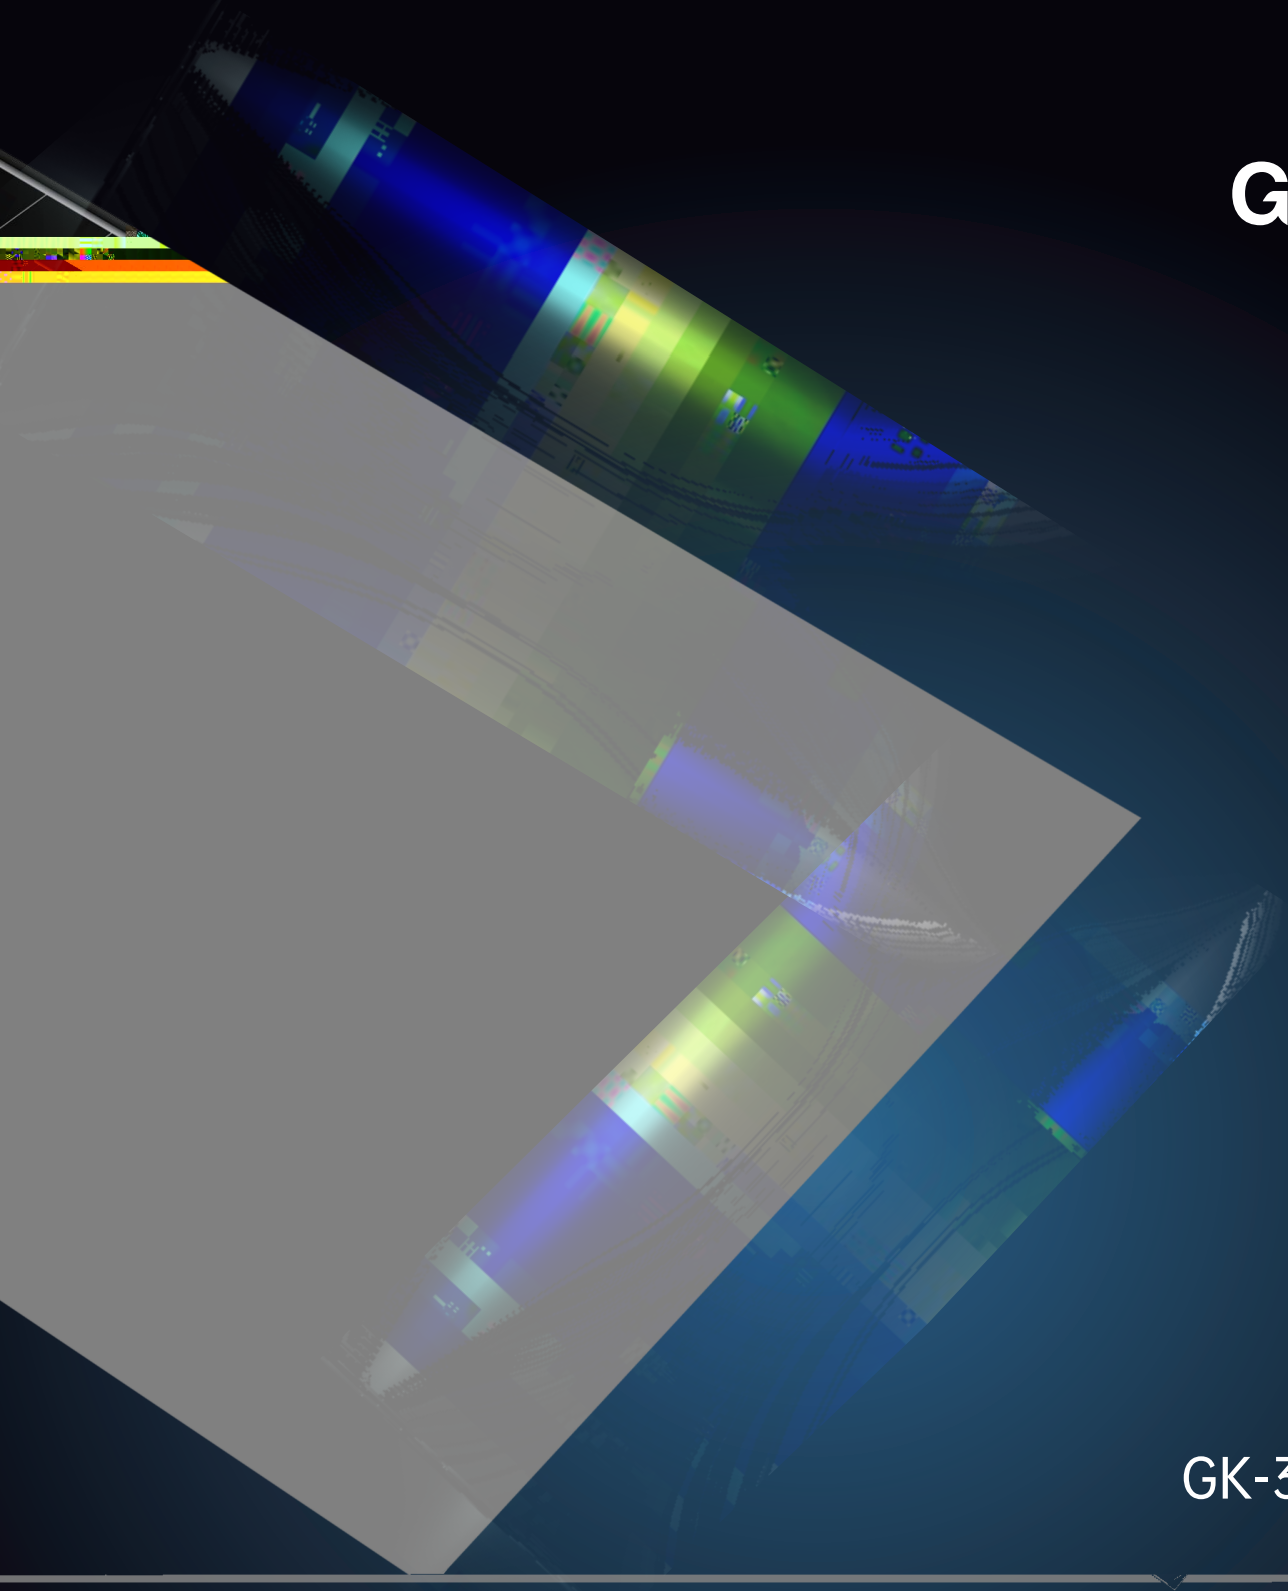

Gokin

GK-3-54HGBD

- Higher Generated Energy
- Higher Reliability
- Lower BOS
- Excellent Micro-crack Resistance
- High Temperature Restriction
- Partial Shading Optimisation
- Extraordinary Aesthetic Design

24.5%

1% First-year Degradation

0.35% Annual Degradation

-40°C ~ +85°C

45±2°C

Mechanical Parameters

Cell Type	GBC
Glass	
Frame	Black anodized aluminum
Output Cables	2 or Customized Length
Dimension	
Connector	
Packaging	
Protection Class	
Fire Rating	

Engineering Drawings

Front Side Back

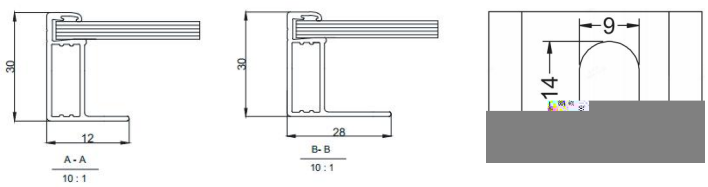

* L:±2mm W:±2mm Unit:mm

Electrical Characteristics STC Test)

Module Type	GK-3-54HGBD-470M		GK-3-54HGBD-475M		GK-3-54HGBD-480M		GK-3-54HGBD-485M		GK-3-54HGBD-490M		GK-3-54HGBD-495M		GK-3-54HGBD-500M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
	23.0		**23.3**		**23.5**		**23.8**		**24.0**		**24.3**		**24.5**	

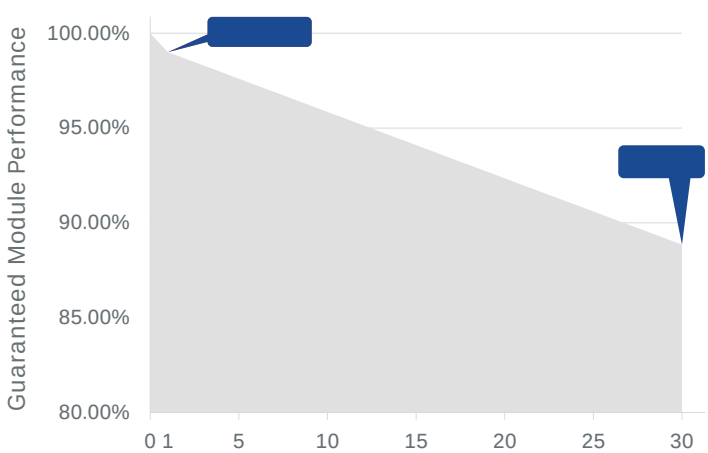

Temperature Ratings (STC)

Mechanical Loading

Front Side Maximum Static Loading
Rear Side Maximum Static Loading
Hailstone Test

Gokin

Gokin Solar Co., Ltd.

Huajin S Hengqin Free Trade Zhuhai

Product data is updated as of Gokin Solar the